


FLUSH BOLTS

GENERAL HARDWARE

MANUAL EXTENSION FLUSH BOLT

DC840, 8402

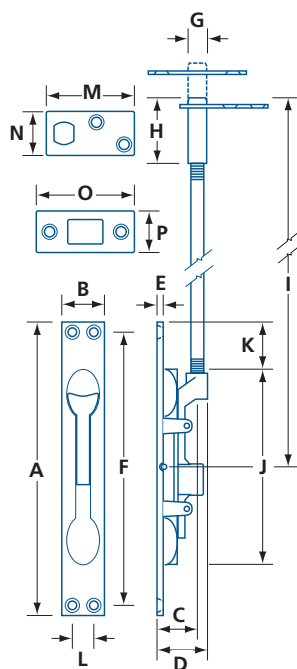

- Supplied with guide, strike plate and 12" (305mm) $\frac{1}{16}$ -18 UNC threaded rod
- Fits metal door preparation per ANSI A115.4-1981
- Zinc-diecast and steel components
- Mounting hardware included: machine and wood screws

#DC840 has a $\frac{3}{8}$ " (15.9mm) throw and $+\frac{5}{8}$ " (15.9mm) adjustment

#8402 has a $\frac{1}{2}$ " (12.7mm) throw and $\pm\frac{1}{4}$ " (6.4mm) adjustment

MODEL	FINISH	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	/UNIT
DC840	C3, C15	6 $\frac{3}{4}$ (171)	1 (25.4)	$\frac{3}{4}$ (19.1)	1 (25.4)	$\frac{9}{64}$ (3.6)	6 $\frac{1}{4}$ (158.8)	$\frac{7}{16}$ (11.1)	1 $\frac{1}{2}$ (38.1)	12 (305)	4 $\frac{3}{4}$ (111)	1 (25.4)	$\frac{1}{2}$ (12.7)	2 (50.8)	1 $\frac{15}{16}$ (23.8)	2 $\frac{1}{4}$ (57)	1 $\frac{15}{16}$ (23.8)	2
8402	C3, C5, C10B, C26D	6 $\frac{3}{4}$ (171)	1 (25.4)	$\frac{3}{4}$ (19.1)	1 (25.4)	$\frac{9}{64}$ (3.6)	6 $\frac{1}{4}$ (158.8)	$\frac{1}{2}$ (12.7)	1 $\frac{1}{2}$ (38.1)	12 (305)	4 $\frac{9}{16}$ (116)	1 (25.4)	$\frac{1}{2}$ (12.7)	2 (50.8)	1 $\frac{15}{16}$ (23.8)	2 $\frac{1}{4}$ (57)	1 $\frac{15}{16}$ (23.8)	2

IN (MM)

