



- Type** • Cylindrical lock
- Certifications**
 - Conforms to ANSI/BHMA A156.2, Series 4000, Grade 1
 - cULus listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - 5 Year limited warranty
- Door Thickness**
 - 1 $\frac{3}{8}$ –2" (35–51 mm)
 - SFIC models: 1 $\frac{9}{16}$ –2" (40–51 mm)
- Handing** • Non handed
- Backset**
 - 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{3}{8}$ " (60 mm) – available
 - 3 $\frac{3}{4}$ " (95 mm) – available
 - 5" (127 mm) – available
- Spring Latch**
 - Stainless steel, $\frac{1}{2}$ " (12.7 mm) throw
 - Deadlatch, $\frac{3}{4}$ " (19 mm) throw – available
- Faceplate**
 - Mortise type, square corners
 - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm)
- Strike** • ASA Strike
- Trim**
 - Stainless steel knob
 - Stainless steel rose
 - Rose diameter: 2 $\frac{15}{16}$ " (74.6 mm)

- Chassis**
 - Concealed mounting plate and screws
 - Removable security posts
- Preparation**
 - Cross bore: 2 $\frac{1}{8}$ " (54 mm)
 - Edge bore: 1" (25.4 mm)
- Cylinder**
 - Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*

Other keyways and keying options available, including CX5 high security. () BEST® and CX5® cores sold separately.*

Functions	10	Passage	70	Classroom
	42	Privacy	80	Storeroom
	53	Entry		
	60	Store		

Finish C32D–Stainless steel

Other finishes available by special order


GX1B	53	C32D
SERIES	FUNCTION	FINISH

SELECTION GUIDE

SERIES	FUNCTION	FINISH ¹	/CASE
GX1B	10 Passage	C32D	6
GX1B	42 Privacy	C32D	6
GX1B	53 Entry ↔	C32D	6
GX1B	53IC Entry SFIC, less core ↔	C32D	6
GX1B	60 Store ↔	C32D	6
GX1B	60IC Store SFIC, less core ↔	C32D	6
GX1B	70 Classroom ↔	C32D	6
GX1B	70IC Classroom SFIC, less core ↔	C32D	6
GX1B	80 Storeroom ↔	C32D	6
GX1B	80IC Storeroom SFIC, less core ↔	C32D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

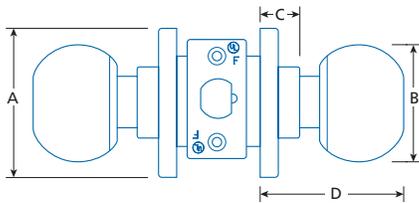

	A	B	C	D*
GX1B 	2 ¹⁵ / ₁₆ (74.6)	2 ¹ / ₄ (57)	1 ³ / ₁₆ (21)	2 ⁵ / ₈ -3 (67-76)
IN (MM)	(*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.			

PARTS & ACCESSORIES



9106

T-Strike, square corners:
1¹/₈x2³/₄" (28.5x70 mm)

9106NH

T-Strike, no hole; square corners:
1¹/₈x2³/₄" (28.5x70 mm)



ASA-T

ASA strike with adjustable tab

ASANH

ASA strike, no hole



9806

CX5 high security SFIC core, 6 pin, 0 bitted

9807

CX5 high security SFIC core, 7 pin, 0 bitted

CX5-TPICB

Tailpiece for use with CX5 SFIC cores

CBI-BF6KD-26D

BEST® F type SFIC core, 6 pin, keyed different

CBI-BF7KD-26D

BEST® F type SFIC core, 7 pin, keyed different



GX1SL238

Passage latch: 2³/₈" (60 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1SL234

Passage latch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1PL238

Privacy latch: 2³/₈" (60 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1PL234

Privacy latch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



GX1DL238

Deadlatch: 2³/₈" (60) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1DL234

Deadlatch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



GX1DL234-34

Deadlatch: 2³/₄" (70 mm) backset,
3/4" (19 mm) throw, 1¹/₈x2¹/₄" (28.5x57 mm)
faceplate



GX1LE334

Backset extension to 3³/₄" (95 mm); use with
2³/₈" (60 mm) backset latch

GX1LE500

Backset extension to 5" (127 mm); use with
2³/₄" (70 mm) backset latch

