Trilogy® T2 DL2700:

#1 standalone electronic keyless access lock

Durable BHMA Grade 1 digital locks available in indoor and outdoor models.











OPERATION: Clutch mechanism permits turning lever without retracting latch and reduces stress on lock bodies and spindle. Outside lever free turning in locked position. Entering access code, key bypass, or remote bypass will allow lever to retract latch. Inside lever always instant egress

DOOR THICKNESS: 1 5/8" to 1 7/8." Other thicknesses. Please consult Alarm Lock

BACKSET: 2 3/4" Standard. 2 3/8" backset also available

KEYPAD: All metal, 12 button programmable for multi-level access functions including group or individual user codes, master and management codes, passage and emergency or service code, lockout and remote override capability and allowable entry time from 5 to 20 seconds. 4 Different keypad tones and keypad may be silenced

STANDARD KEY OVERRIDE CYLINDERS: Solid brass 6 pin tumbler cylinder pinned 5, SC1 keyway, furnished in all locks. Additional tailpieces included: HW580 fits Schlage, Corbin/Russwin CL, Sargent 480 Series, ASSA65-611. Model HW620 fits Ilco and Lori cylinders

INTERCHANGEABLE CORE MODELS: Accepts 6 & 7 Pin Cylinders from: Best, Arrow, KSP, Medeco Keymark & Kaba Peaks. Also available IC Core models for Yale, Medeco, Sargent, Corbin/Russwin CL and Schlage. Alarm Lock Tailpiece is supplied; IC Core is not included

LATCHBOLT: UL Listed, fire rated, 3 hours, 1/2" throw, solid brass, deadlocking. Reversible. Adjustable front for flat or beveled doors

STRIKE: 1 $1/8" \times 2 3/4"$ T strike & 1 $1/4" \times 4 7/8"$ ASA strike included. With screws for wood or metal jambs

LATCH FRONT: 1 1/8" x 2 1/4" wrought brass or stainless steel

HANDING: Non-handed

FINISHES: US3 polished brass, US26D satin chrome, 10B Duronodic

POWER: 5 AA alkaline batteries are now rated at 200,000 cycles, supplied. Audible low battery alert, visual and audible entry indicators, unique Flex Drive® motor

DOOR PREP: Standard ANSI 161 Series Prep, modified by adding additional through-bolt holes

COMPLIANCES: Grade 1, heavy duty cylindrical lockset, UL listed and FCC certified. ADA compliant leversets

Trilogy is available in many additional models, including those for outdoors, and/or Mortise, exit trim panic devices, plus with Prox ID card reader, dual-sided keypads, wireless lock networks and more.


Some other Trilogy Options:


DL2700LD With LocDown™ Indicator Light Bar & Keyfob

DL2700CR T2 Mortise, Classroom version

DL2700DB T2 Mortise, Deadbolt version

DL2800 Economical Audit Trail Security Lock provides keyless entry for up to 200 users

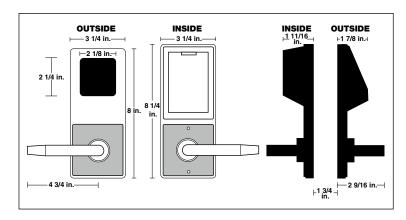

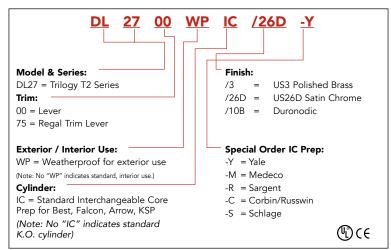







Lever set in US3 With IC Core in 26D DL2700/3 DL2700IC/26D

Secure battery compartment on inside door



DL2775/26D

DL1200/1300 Models for Narrow Stile Glass Doors

DL1200ET T2 Narrow Stile Exit Trim for use with Panic Devices (generic rim cyl. supplied)

ETDL27 T2 Exit Trim for use with Panic Devices (generic rim cyl. supplied)

DL/PDL5300 Dual-Sided PIN/Prox Lock with audit/trail

DL3000, DL3200 Advanced digital electronic door lock with audit trail

RR-TRILOGYKIT Optional Remote Release Kit

See Trilogy Networx™ Locks for wireless network capabilities



Alarm Lock Systems, LLC (A Division of NAPCO Security Technologies, Inc.) 333 Bayview Ave, Amityville, New York 11701

1-800-ALA-LOCK • www.alarmlock.com • salesinfo@alarmlock.com