DK3000 and PDK3000 - Installation Instructions
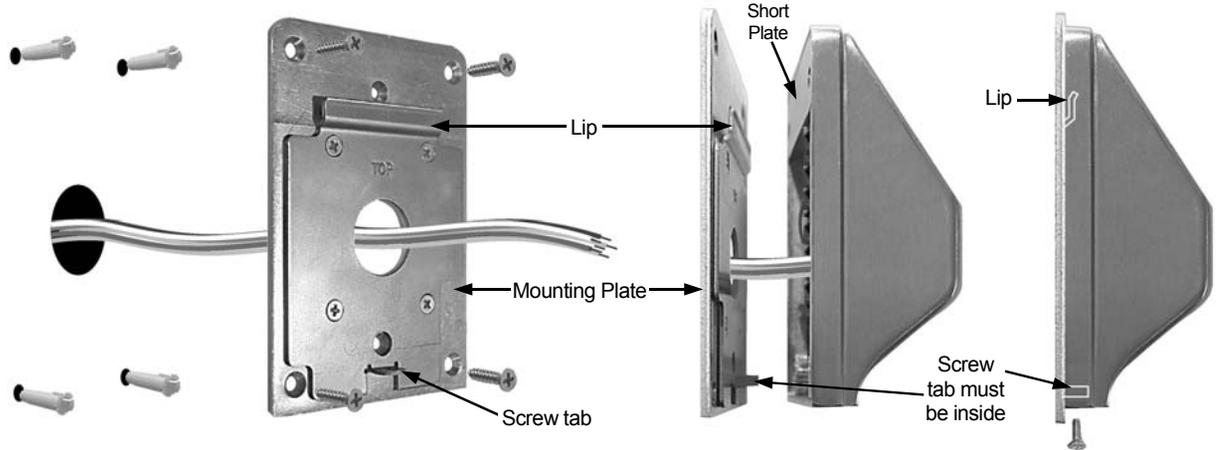
WALL INSTALLATION
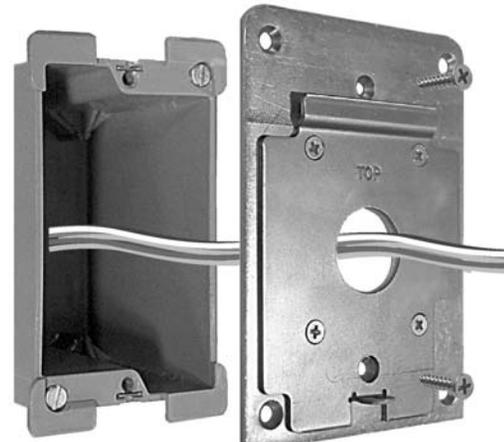
1. Use Mounting Plate as a template to trace and drill four 7/32" diameter holes for wall anchors and 1" hole for wires.

2. Pull all existing wires through wall and Mounting Plate.

3. Position Mounting Plate and fasten with four wall anchor screws. Connect wires as necessary using wire nuts supplied. Push wires inside.

4. Position unit so that the Short Plate can be placed over the lip on the Mounting Plate.

5. Press unit flush with Mounting Plate and pull down. Fasten with screw.

DK3000 Remote Access Controller

Labels in wall installation diagram: Short Plate, Lip, TOP, Mounting Plate, Screw tab, Lip, Screw tab must be inside

GANG BOX INSTALLATION

A. Pull all existing wires through wall Gang Box and Mounting Plate.

B. Position Mounting Plate and fasten with two flathead screws

PDK3000 Remote Access Controller with PROX

RED	BLACK	PURPLE	BLUE	GRAY	BLACK	WHITE	PINK	WHITE	WHITE	BLACK	BLUE
Power	Ground	Common	Norm Closed	Norm open	Common	Norm Closed	Norm Open	Remote Release Input		Tamper Switch Wires	

Primary/Entry Relay   Aux.Relay